


DemoPro (GDP)



FEATURES

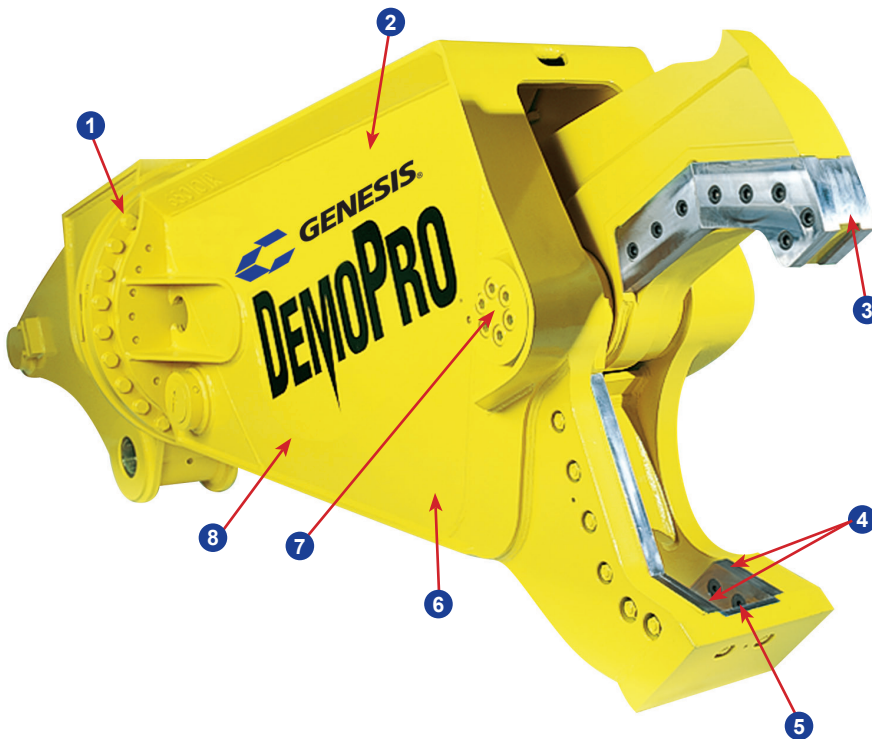

- 1 360° rotation is standard with every DemoPro
- 2 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 3 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 4 Exclusive dual guide blade system accommodates heat expansion at the tip while maintaining tighter tolerances where the primary cutting blades pass
- 5 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- 6 Enclosed structure adds strength and rigidity while protecting the cylinder
- 7 Shrouded heavy-duty pivot design provides structural strength and long-term durability
- 8 Built with Weldox steel for the best combination of structural strength and wear durability

APPLICATIONS

- Demolition
- Bridge Dismantling and Processing
- Concrete Recycling



Metric Specs:

Model	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Wt. Boom Mount (mt)	Minimum Excavator Wt. Stick Mount (mt)
GDP 450	2,041 (kg)	610 (mm)	533 (mm)	2,591 (mm)	11	20
GDP 650	3,447 (kg)	711 (mm)	635 (mm)	2,794 (mm)	19	30
GDP 900	5,216 (kg)	965 (mm)	914 (mm)	3,403 (mm)	30	44
GDP 1200	6,532 (kg)	1,067 (mm)	1,016 (mm)	4,267 (mm)	39	54

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

Every Genesis DemoPro is covered by a 12-month, 1,500-hour (whichever occurs first) warranty.

Genesis reserves the right to continually make product improvements designed to positively enhance performance.