


XP Mobile Shear (GXP)

FEATURES

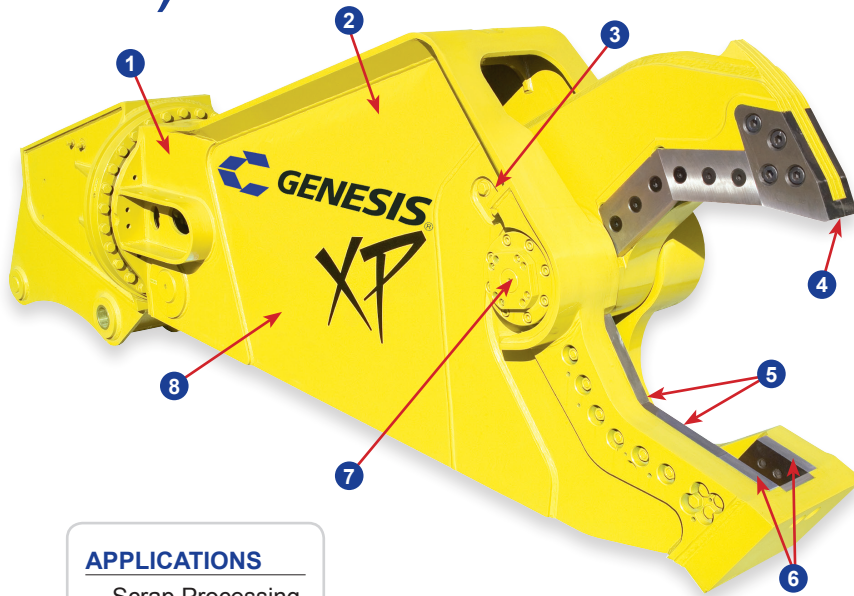

APPLICATIONS

- Scrap Processing
- Demolition

- 1 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 2 Enclosed structure adds strength and rigidity while protecting the cylinder
- 3 Exclusive easy to shim AutoGuide system helps maintain blade tolerances by off-setting jaw deflection
- 4 Patented bolt-on piercing tip is replaced in minutes without grinding or welding
- 5 Four-way indexable guide blades, razor blade and primary blades provide four useable cutting edges
- 6 Exclusive dual guide blade system accommodates heat expansion at the tip while maintaining tighter tolerances where the primary and secondary cutting blades pass
- 7 Shrouded heavy-duty pivot design provides structural strength and long-term durability
- 8 Built with Wieldox steel for the best combination of structural strength and wear durability

Metric Specs:

Model Number	Weight* (kg)	Jaw Opening (mm)	Jaw Depth (mm)	Reach** (mm)	Minimum Excavator Wt. Boom Mount (mt)	Minimum Excavator Wt. Stick Mount (mt)
GXP 200***	2,268	457	432	1,778	11	18
GXP 200R***	2,495	457	432	2,667	13	20
GXP 300***	3,493	584	610	2,134	16	22
GXP 300R***	3,674	584	610	3,099	20	30
GXP 400	3,992	711	737	2,438	20	34
GXP 400R	4,990	711	737	3,530	24	40
GXP 440 MAXX***	5,171	711	737	2,667	22	36
GXP 440R MAXX***	5,897	711	737	3,708	27	45
GXP 500	5,466	813	813	2,769	24	44
GXP 500R	6,055	813	813	3,784	30	49
GXP 660 MAXX***	6,214	813	813	3,048	27	45
GXP 660R MAXX***	7,031	813	813	4,115	34	54
GXP 700	6,260	889	889	3,048	31	49
GXP 700R	7,711	889	889	4,216	40	61
GXP 990 MAXX***	7,031	889	889	3,226	39	61
GXP 990R MAXX***	8,165	889	889	4,572	45	77
GXP 1000	6,804	965	965	3,277	40	63
GXP 1000R	8,391	965	965	4,597	45	77
GXP 1200	9,389	1,067	1,067	3,353	49	77
GXP 1200R	11,929	1,067	1,067	4,851	68	113
GXP 1500	10,750	1,118	1,118	3,505	54	86
GXP 1500R	13,381	1,118	1,118	5,004	72	113
GXP 2500	20,865	1,168	1,219	4,445	90	127
GXP 2500R	24,494	1,168	1,219	6,629	108	163

*Weight includes mounting bracket to attach to excavator.

**Distance is measured from the attachment mounting pivot (boom or stick) forward.

***GXP 200 and 300 series shears offer a single guide blade system.

GXP MAXX models deliver extra shear power for heavy-duty processing.

Extended reach brackets are available on all non-rotating shears.

Genesis GXP shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty. Genesis reserves the right to continually make product improvements designed to positively enhance performance.



1000 Genesis Drive, Superior, WI 54880
888-SHEAR-IT (743-2748) - Tel: 715.395.5252 - Fax: 715.395.5255
genesisattachments.com - info@genesisattachments.com