


GRINDING SYSTEM FOR ELECTRICAL CABLES MOD. MC 300, DESIGN NO. 98.01.01/A
AVERAGE HOURLY GRINDING RATE OF APPROX. 200-250 KG OF ASSORTED ELECTRICAL CABLES, WITH A 50% COPPER CONTENT.

THE SYSTEM CONFORMS TO E.C. REGULATIONS AND IS MADE UP OF:

- 1) **CONVEYOR BELT mod. N1 (G)** Conveyor of shredded material; driven by electrical gear motor, .75 kW capacity, 400 Volts, 50 Hz., tri-phase; rubber belt extends to 3.200 x 400 mm, with special teeth that ensure excellent collection and transport of material to be processed; edges protected by brushes on loading side to ensure that material does not fall off the belt; metal slide under discharge side to convey and collect any material not discharged; equipped with brackets to hold magnetic plate and aspirator pipe.
- 2) **1 MILL MOD. M1 (B)** 11 kW capacity, 400 Volts, 50 Hz, tri-phase, 36 interchangeable blades set on three propellers on the mill rotor; 4 adjustable, interchangeable counter blades set on mill frame; 2 grills, diameter 5 mm and 4 mm, included; includes vibrating extractor, machine stop command, loading hopper with safety device for manual loading.
- 3) **1 DUST ASPIRATOR (A)**, capacity 2.2 kW, 400 Volts, 50 Hz; aspiration-filtering system consists of an open-blade ventilator with top-facing air inlet, a metal body where dust is blown in; equipped with filters (bags or cartridges) on top and bags on the bottom to gather waste material.
- 4) **CONVEYOR BELT mod. N1 (D)** Conveyor of shredded material; driven by electrical gear motor, .75 kW capacity, 400 Volts, 50 Hz., tri-phase; rubber belt extends to 3.200 x 400 mm, with special teeth that ensure excellent collection and transport of material to be processed; edges protected by brushes on loading side to ensure that material does not fall off the belt; metal slide under discharge side to convey and collect any material not discharged; equipped with brackets to hold magnetic plate and aspirator pipe.
- 5) **1 STATIONERY MAGNETIC PLATE 250x210x70 (C) MP 25x21**, made up of a steel plate that holds powerful, high-induction, stationery magnets, appropriately calculated, that ensure excellent depth of field. Size: 250 x 210 – Sp 70 mod. MP. Magnetic force 100 Gauss at a distance of 200 mm.
- 6) **1 DENSIMETRIC SEPARATION TABLE - WATER SYSTEM - MOD. T.A.1 €** vibrating metal table, specially treated and painted with corrosion-resistant epoxy dust paints; rubber-covered work surface includes the water pump for the shower system, which is made up of 11 adjustable sprayers fed through rigid PVC pipes. The movement gears (eccentric and fulcrum) are supported by double row ball bearings to ensure perfect support of the axes that are subjected to oscillation and vibration. Equipped with a belt for waste material with a steel-section weight-bearing structure, and stainless steel carter container and water collection basin. The waste material belt is in the carter container, and is made up of two metal chains linked six places by metal joints, to which the plastic paddles are attached. Densimetric table dimensions: 2,400 x 400 mm. Pump capacity: 0.75 kW, 400 Volts, 50 Hz, tri-phase. Vibrating table capacity: 0.75 kW, 400 Volts, 50 Hz., tri-phase. Evacuation belt capacity: 0.5 kW, 400 Volts, 50 Hz., tri-phase, Water tank standard.

- 7) **1 GENERAL ELECTRICAL BOARD (F)** equipped with the command and safety switches for all components described above.



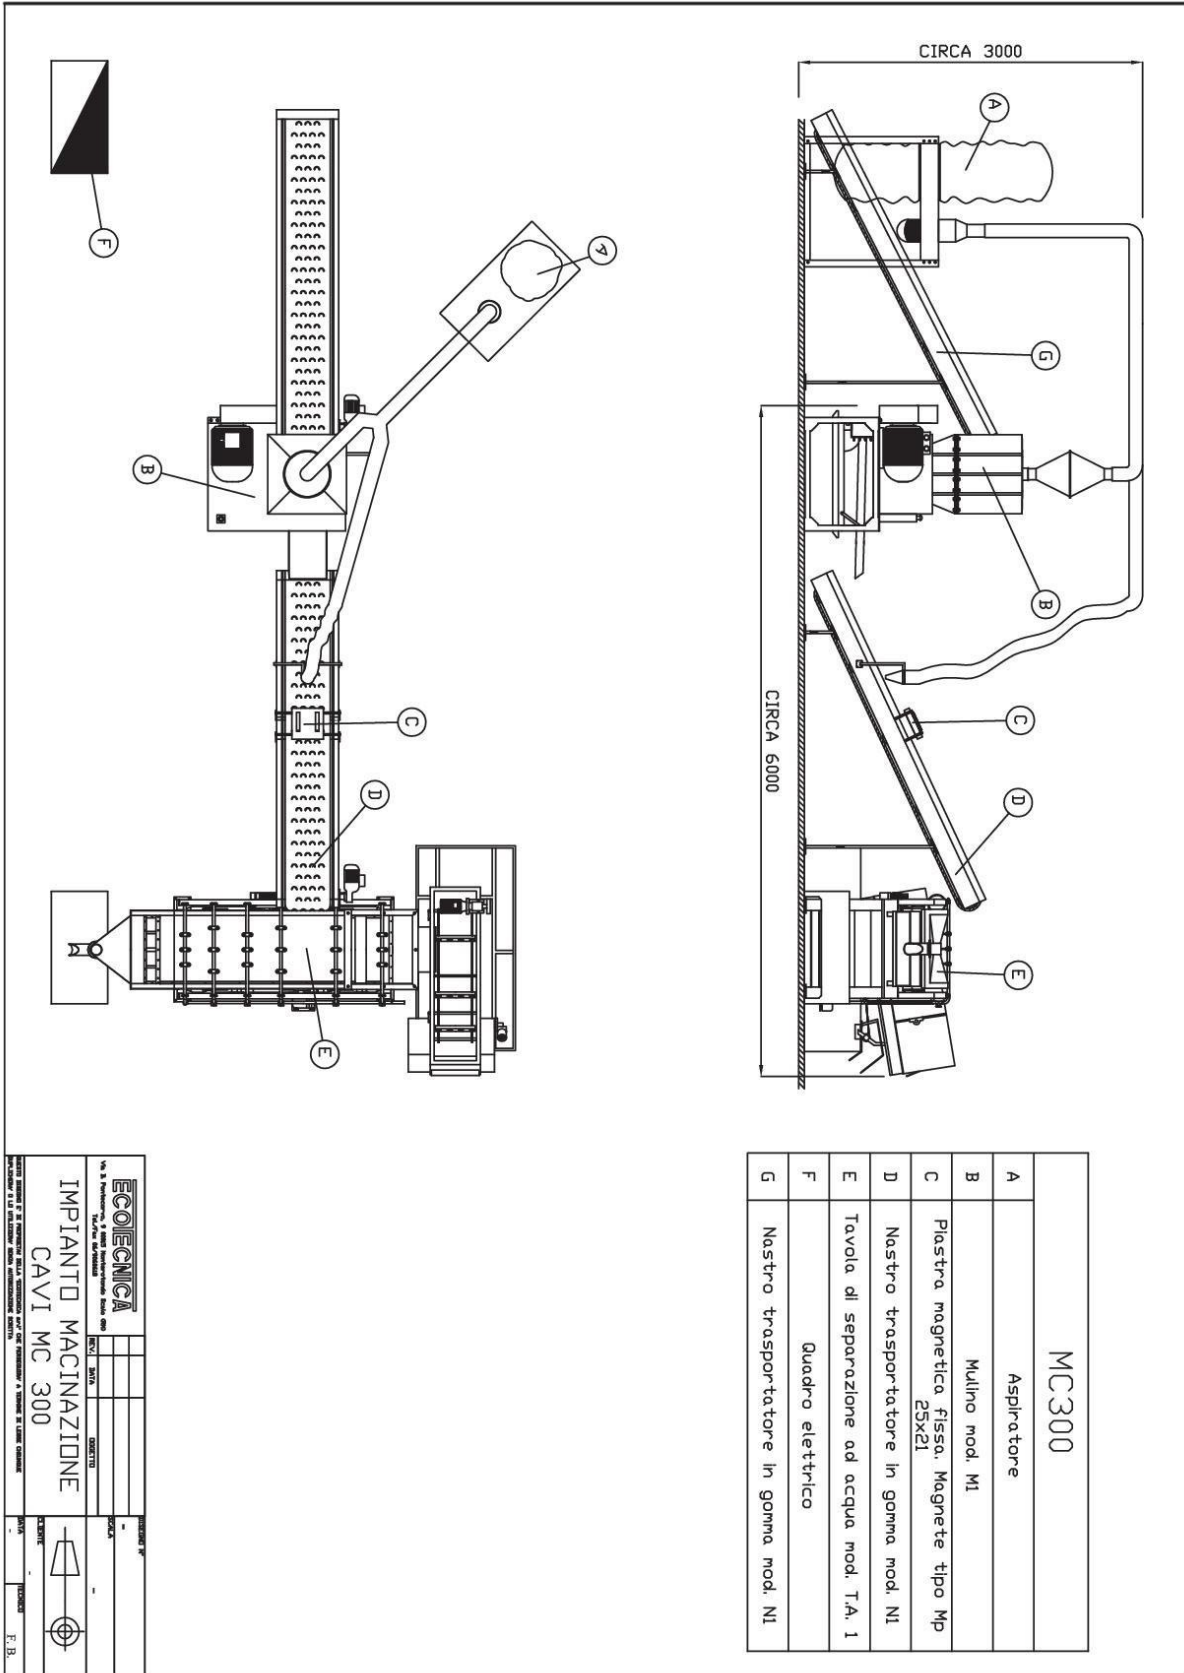

ECO TECNICA		No. 2 Via Pontecorvo, 9 - 00115 Monterotondo (RM) - Tel. +39 06.90085361 - Fax +39 06.9060618	
IMPIANTO MACINAZIONE		C.A.T.A. S.p.A. - Via Pontecorvo, 9 - 00115 Monterotondo (RM) - Tel. +39 06.90085361 - Fax +39 06.9060618	
CAVI MC 300		C.A.T.A. S.p.A. - Via Pontecorvo, 9 - 00115 Monterotondo (RM) - Tel. +39 06.90085361 - Fax +39 06.9060618	
