



GORILLA®


Two Ram Baler

Processes:

Newspaper (ONP)
Cardboard (OCC)
High Grade Paper
Solid Waste (MSW)
Plastics (PET, HDPE, Film)
Cans (Steel/Aluminum)
White Goods
Electronic Scrap
Non-Ferrous Metals
RDF

The Harris Gorilla Baler provides dense bales and high throughputs at an economical price for a variety of materials. The Gorilla Baler is designed for easy operation and simple maintenance.

 **Harris**®




Standard Features:

- 3500 PSI (241 bar) system operating pressure.
- Harris SmartKnife™ System.
- Rake angle knife beam.
- Choice of serrated or straight shear knife.
- 12" (305mm) bore main cylinder, 198 tons (180 tonnes) of force, 236 psi (16.3 kg/cm²) ram face psi.
- 9" (229mm) eject cylinder, 111 tons (100 tonnes) of force, 203 psi (14 kg/cm²) ram face psi.
- Shimless platen hold-down adjustment.
- High Quality Abrasion Resistant material replaceable liners including tongue and groove floor liners.
- Multi-Material controller with:
 - Phone modem
 - 10" touch screen display English/Spanish
 - Diagnostics
 - Full automatic operation on majority of materials.
- Heavy-duty cylinders.
- Heavy-duty uni-body frame construction.
- Penetrating main ram, 60% penetration into the bale chamber.
- Plug bale compatible.
- Flooded suction power unit.
- 10 micron kidney loop filtration.
- Accent or L & P auto tier - 11 or 12 gauge high tensile wire
- Soft start main motor starting.
- 3 phase, 60 hz, 480 V electrical.
- Harris standard warranty.
- Laser positioning system for all ram and bale exit door movements
- Trapped key hopper access door interlocks and category 3 safety monitoring system.



Options:

- Harris Combo Door™
- 13" (330) bore main cylinder, 232 tons (211 tonnes), 277 psi (19.1 kg/cm²) ram face psi.
- Hopper extension up to 96" (2438mm) high.
- Bale discharge table.
- Elevated operator's platform.
- Climate controlled operator's cab.
- Feed conveyors.
- Lower main ram wiper
- CE rating.
- Alternative power unit locations.
- Other languages, electrical voltages, & options on request.
- Bale wrapping systems
- Video camera system
- Available in 100 hp (74.6 kw), 150 hp (111.9 kw) and twin 100 hp (149.1 kw)

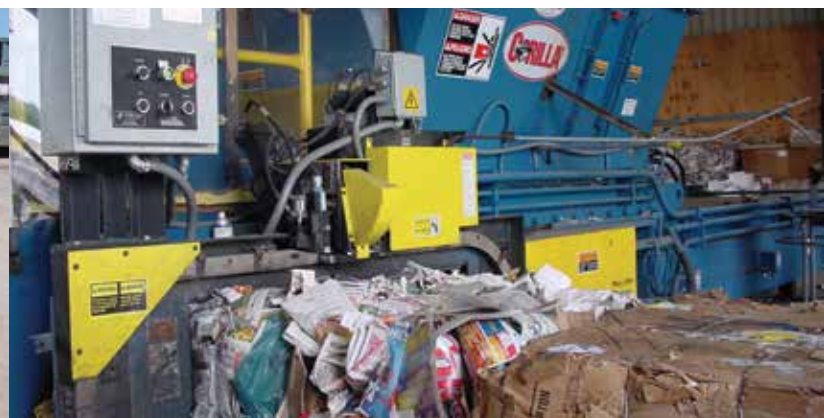

Call today for more information

912.367.4661
800-373-9131

www.harrisequip.com

*All products and features are subject to change. Photos not necessarily representative of new equipment



Harris ©2014 - Gorilla14 -